



Mobile unit S 3-01

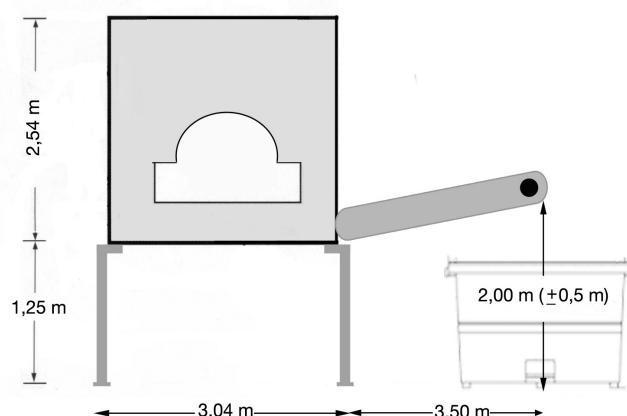

Technical details

Construction	Self contained mobile unit
Centrifuge	Two phases, co-current
Type	S 3-01
Material	Hlgh-strenght steel
Nominal capacity	20 m ³ /hour
Electric power required	40 kW a 380 V, 50 Hz (100 KVA)
Start	Star-triangle
Electric plug	Direct with electric wire up to 25 m.
Electric frame	Automatic/manual
Water usage	2.000 liters/h 2-3 bars pressure
Water inlet	1 ½" male screw pipe
Sludge inlet	3" male screw pipe
Max. distance for plugs	25 meters
Polymere unit	Liquid or powder
Tanks	3 x 600 liters
Shakers	3 x 0,5 kW
Flow meter	For sludge and flocculant
Timer	Hydraulic pump and sludge pump
Convoyer band	4 meters
Weight	9 T

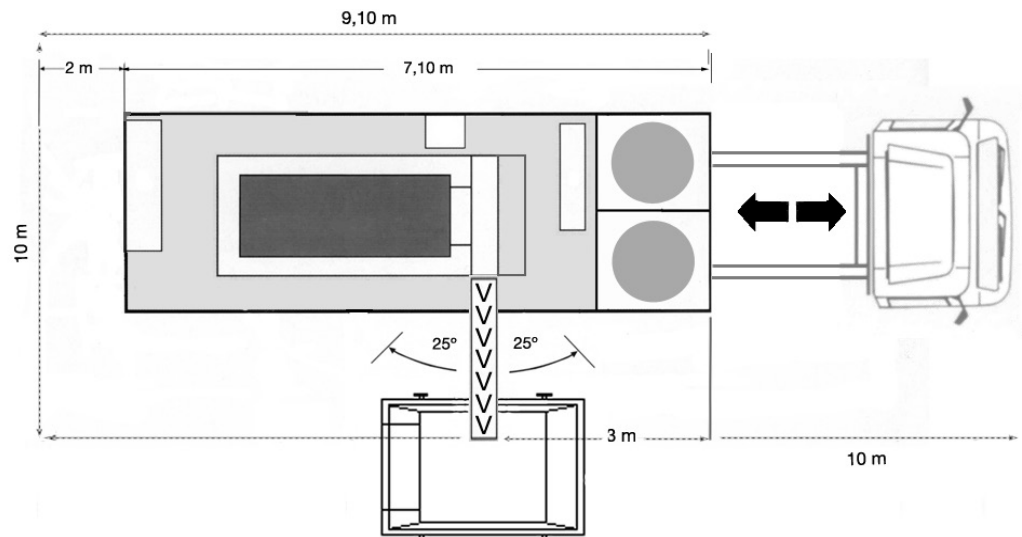

Truck exit minimum
space : 8 m.

Operating surface should be
flat, paved and with at least
100 m² free space