



# Mobile unit S 3-2

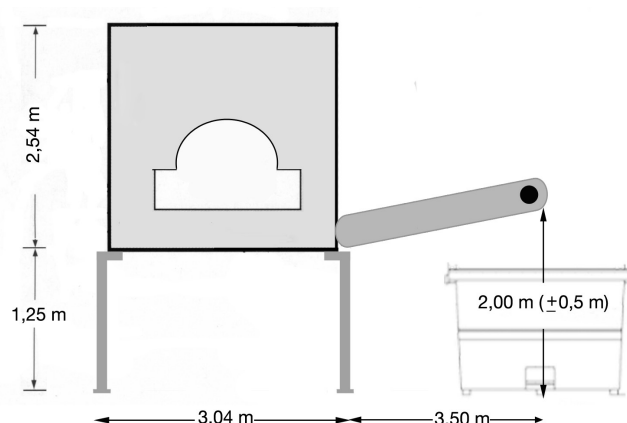

## Technical details

<b>Construction</b>	Self contained mobile unit
<b>Centrifuge</b>	Two phases, co-current
<b>Type</b>	S 3-2
<b>Material</b>	Hlgh-strenght steel
<b>Nominal capacity</b>	30 m <sup>3</sup> /hour
<b>Electric power required</b>	60 kW a 380 V, 50 Hz (100 KVA)
<b>Start</b>	Star-triangle
<b>Electric plug</b>	Direct with electric wire up to 25 m.
<b>Electric frame</b>	Automatic/manual
<b>Water usage</b>	2.000 liters/h 2-3 bars pressure
<b>Water inlet</b>	1 ½" male screw pipe
<b>Sludge inlet</b>	3" male screw pipe
<b>Max. distance for plugs</b>	25 meters
<b>Polymere unit</b>	Liquid or powder
<b>Tanks</b>	1 x 1.600 liters
<b>Shakers</b>	2 x 1,5 kW
<b>Flow meter</b>	For sludge and flocculant
<b>Timer</b>	Hydraulic pump and sludge pump
<b>Convoyer band</b>	6 meters
<b>Weight</b>	9 T

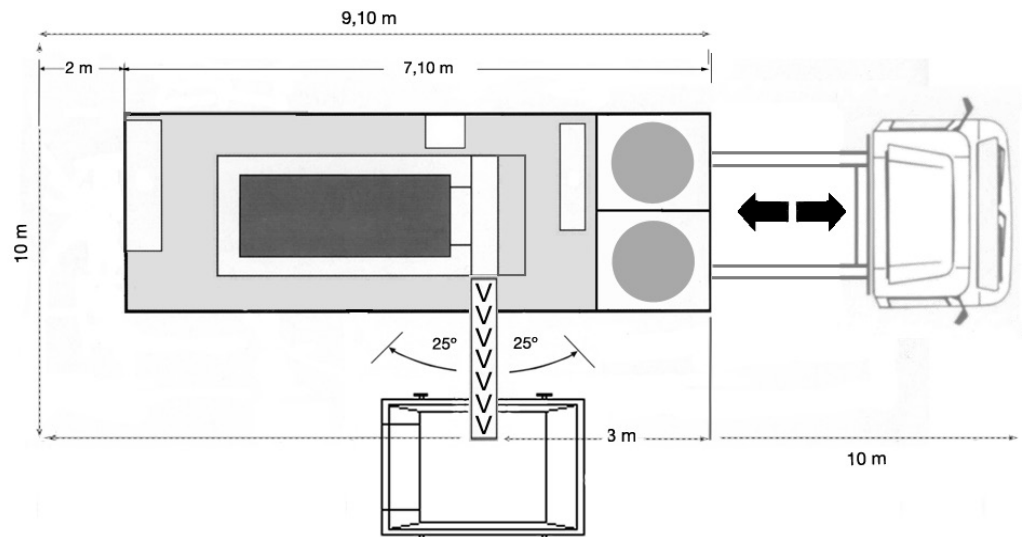

Truck exit minimum  
space : 8 m.

Operating surface should be  
flat, paved and with at least  
100 m<sup>2</sup> free space